



T ELENOR

SPECIFICATION

Specification no.: OA 107
Edition: 4.6
In force from: 23.06.2015

Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})

Document ID : OA 107_20150623
Abstract : Requirements for the equipment of an Operator leasing copper pairs in the access network of Telenor in order to provide Nx64 kbit/s digital transmission

Telenor Norge AS
N-1331 Fornebu, Norway
Telephone: +47 810 77 000

TELENOR SPECIFICATION		
Specification OA 107	Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})	
Date: 23.06.2015	Edition: 4.6	Page: 2 of 8

CONTENT

1 SCOPE.....3

2 REFERENCES3

2.1 NORMATIVE REFERENCES3

2.2 INFORMATIVE REFERENCES3

3 DEFINITIONS AND ABBREVIATIONS4

4 APPLICATION4

5 GENERAL REQUIREMENTS.....4

6 TRANSMISSION SYSTEM5

7 ELECTRICAL CHARACTERISTICS5

7.1 GENERAL.....5

7.2 REMOTE FEEDING5

7.3 TRANSMITTER/RECEIVER IMPEDANCE AND RETURN LOSS6

7.4 PSD MASKS6

7.5 POWER BACK-OFF6

7.6 UNBALANCE ABOUT EARTH6

Annex 1: Document history

Annex 2: Statement of Compliance

TELENOR SPECIFICATION		
Specification OA 107	Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})	
Date: 23.06.2015	Edition: 4.6	Page: 3 of 8

1 Scope

This specification gives requirements for equipment owned by Operator and intended for connection to local loop in the access network of Telenor. The requirements apply for SHDSL equipment supplying Nx64 kbit/s bit stream for duplex and symmetrical operation on single copper pair in the range of 192 kbit/s to 5696 kbit/s using Trellis pre-coding and pulse amplitude modulation (TC-PAM). There are 5 classes of service:

G1	≤ 648 kbit/s
G2	≤ 1 224 kbit/s
G3	≤ 2 320 kbit/s
G4	≤ 4 160 kbit/s
G5	≤ 5 696 kbit/s

Since SHDSL is spectrally incompatible with other xDSL systems (eg. ADSL) from bit rate 1224 kbit/s and above, it is mandatory to implement the Power Back-off function in 7.5.

The Operator is responsible that the equipment is in conformance to this specification.

For equipment to be installed in Telelosji the formulary ‘Statement of Compliance’ in annex 2 shall be completed and forwarded to Telenor.

2 References

This specification incorporates by dated or undated references, provisions from other publications/standards. These normative references are cited at the appropriate places in the text and the references are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this specification only when incorporated in it by amendment or revision. For undated references, including amendments, the last edition of the document referred to applies.

2.1 Normative references

- [1] ITU-T G.991.2: “Single-pair high-speed digital subscriber line (SHDSL)”
- [2] Telenor Specification OA 100: “General requirements for equipment to be connected to the local loop in the access network of Telenor and/or material and equipment to be installed and operated in Telelosji”

2.2 Informative references

- [3] Telenor Nett Specification A59 (2001-05): “Access to copper pairs in the access network of Telenor. Specification of the network side of the user-network interface”
- [4] Telenor Specification OA 104 (2006-01): “Requirements for equipment to be connected to the local loop in the access network of Telenor. HDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type D_{AF})”

TELENOR SPECIFICATION		
Specification OA 107	Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})	
Date: 23.06.2015	Edition: 4.6	Page: 4 of 8

3 Definitions and abbreviations

Telelosji	Colocation at the premises of Telenor
Operatøraksess	Operators' access to the access network of Telenor
DB	Distribution Box
HDSL	High bit rate Digital Subscriber Line
MDF	Main Distribution Frame
NTP	Network Termination Point
SHDSL	Single-Pair High-Speed Digital Subscriber Line
STU	SHDSL Transceiver Unit
TC-PAM	Trellis Coded Pulse Amplitude Modulation
xDSL system	Any type of digital transmission system for the subscriber loop

4 Application

The STUs are placed both in the vicinity of the MDF of Telenor and at the subscriber's premises (NTP), as shown in figure 1. A one pair transmission system shall be used.

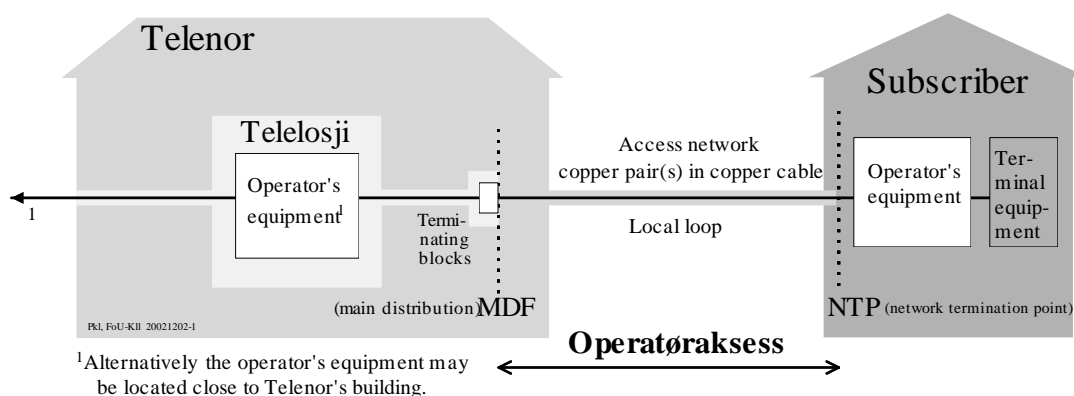


Figure 1 Configuration of the access network.

5 General requirements

All installed equipment operating in Telelosji or used for Operatøraksess shall fulfil requirements stated in Telenor Specification OA 100 [2] related to:

- safety
- environmental conditions
- documentation

TELENOR SPECIFICATION		
Specification OA 107	Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})	
Date: 23.06.2015	Edition: 4.6	Page: 5 of 8

6 Transmission system

The SHDSL transceivers shall operate using Trellis Coded Pulse Amplitude Modulation (TC-PAM) line code. This specification specifies a two-wire operational mode SHDSL-system (G.991.2/Annex B) that is capable of supporting user data rates from 192 kbit/s to 2 304 kbit/s ($n \times 64 + i \times 8$ kbit/s, where $3 \leq n \leq 36$ and $0 \leq i \leq 7$. For $n=36$, i is restricted to the values of 0 or 1.

ITU-T G.991.2 [1] Annex F shall not be used in the access network of Telenor.

ITU-T G.991.2 [1] Annex G (32 TC-PAM) may only be used if the requirements in sub clause 6.1 are fulfilled.

6.1 G.991.2 Annex G

This specification specifies a SHDSL-system (G.991.2/Annex G) that is applicable for single-pair rates given by $n \times 64 + i \times 8$ kbit/s where for 32-TCPAM, $12 \leq n \leq 89$ and $0 \leq i \leq 7$. For 32-TCPAM and $n = 89$, the applicable value of i is 0. This corresponds to (payload) data rates from 768 kbit/s to 5696 kbit/s in increments of 8 kbit/s for 32-TCPAM.

To reduce the negative impact from G.991.2/Annex G on other systems in the same cable the following restrictions apply:

>2320 kbit/s 16 TC-PAM :

- >2320 kbit/s 16 TC-PAM shall not be used

4160 kbit/s 32 TC-PAM:

- The loop length shall not exceed 1400 meters (0.4mm) / 2100 meters (0.6mm) or min.14.5 dB loop attenuation at 150 kHz.

5696 kbit/s 32 TC-PAM:

- The loop length shall not exceed 1000 meters (0.4mm) / 1500 meters (0.6mm) or min. 10.5 dB loop attenuation at 150 kHz.

7 Electrical characteristics

7.1 General

Equipment for G1, G2, G3, G4 and G5 shall satisfy the relevant requirements for the transceiver specified below. The requirements refer to ITU-T G.991.2 [1], clause 11.

7.2 Remote feeding

The feeding voltage shall not exceed -110 V. In this case the feeding voltage on both feeding leads shall be non-positive referred to ground potential.

Note! The feeding voltage may be symmetrical with ± 55 V referred to ground.

The feeding current shall not exceed 40 mA.

TELENOR SPECIFICATION		
Specification OA 107	Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})	
Date: 23.06.2015	Edition: 4.6	Page: 6 of 8

7.3 Transmitter/receiver impedance and return loss

The nominal driving point impedance at the line side and the return loss shall be according to ITU-T G.991.2 [1], subclause 11.3 and Annex B.5.2.

7.4 PSD masks

For all data rates except STU operating in accordance with subclause 6.1, the measured transmit PSD of each STU shall not exceed the PSD symmetrical masks specified in ITU-T G.991.2 [1], Annex B.4.1., figure B.7.

7.5 Power Back-off

The Power Back-off function is implemented to reduce crosstalk impairments to other transmission systems utilizing the same cable. The Power Back-off function defined in ITU-T G.991.2 [1], subclause 6.4.1.10 is mandatory.

7.6 Unbalance about earth

The longitudinal conversion loss (LCL) and the longitudinal component of the output signal shall be in accordance with ITU-T G.991.2 [1], subclause 11.3 and Annex B.3.2.



Telenor Norge AS
N-1331 Fornebu Norway
Telephone: +47 810 77 000

TELENOR SPECIFICATION

Specification OA 107 Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})

Date: 23.06.2015

Edition: 4.6

Annex 1

Page: 1

Annex 1: Document history

Edition	Published	Comments
1.0	01.11.01	Kjell E. Sterten, TTS-NL-I-P
2.0	01.02.02	Kjell E. Sterten, TTS-NL-I-P
3.0	31.12.02	Jon Weberg, NL-I-AN
4.0	01.01 2004	Kjell E. Sterten, TN-NL-U-T
4.1	01.01 2005	Heidi Eide, TN_SMP
4.2	01.03 2005	Kjell E. Sterten, TN-NL-U-T
4.3	31.10 2005	Kjell E. Sterten, TNO-FX-PT-I&P
4.4	01.01.2007	Jon Weberg, TNO-FX-PT-I&P
4.5	01.05.2007	Vidar Skovli, BBP/A
4.6	23.06.2015	Erik Meltzer

STATEMENT OF COMPLIANCE

**TELENOR
Specification OA 107**

Requirements for equipment to be connected to the local loop in the access network of Telenor. SHDSL equipment providing Nx64 kbit/s digital transmission, full unbundled access (service type G_{AF})

Date: 23.06.2015

Edition: 4.6

Annex 2

Page: 1

Date:

Operator:

System identification (vendor, model, type):

Connection to the access network of Telenor: Yes (direct) Indirect (aux. equip.).....

The given information is valid. Date/Signature:

_____ (sign.)

FC = Fully compliant NC = Non-compliance

Clause no.	Description	Statement of Compliance		Remarks and additional information	For internal use
		FC	NC		
1	Scope	<input type="checkbox"/>	<input type="checkbox"/>		
2	References				
2.1	Normative references	<input type="checkbox"/>	<input type="checkbox"/>		
2.2	Informative references	<input type="checkbox"/>	<input type="checkbox"/>		
3	Definitions and abbreviations	<input type="checkbox"/>	<input type="checkbox"/>		
4	Application	<input type="checkbox"/>	<input type="checkbox"/>		
5	General requirements	<input type="checkbox"/>	<input type="checkbox"/>		
6	Transmission system	<input type="checkbox"/>	<input type="checkbox"/>		
6.1	G.991.2 Annex G	<input type="checkbox"/>	<input type="checkbox"/>		
7	Electrical characteristics				
7.1	General	<input type="checkbox"/>	<input type="checkbox"/>		
7.2	Remote feeding	<input type="checkbox"/>	<input type="checkbox"/>		
7.3	Transmitter/receiver impedance and return loss	<input type="checkbox"/>	<input type="checkbox"/>		
7.4	PSD masks	<input type="checkbox"/>	<input type="checkbox"/>		
7.5	Power Back-off	<input type="checkbox"/>	<input type="checkbox"/>		
7.6	Unbalance about earth	<input type="checkbox"/>	<input type="checkbox"/>		